



AV10411

*SHP 50 adds hydrophobic properties to cement-based materials including concrete, stucco, plaster, grout, and mortar.*

- Mixes easily for economically making materials hydrophobic.
- Increases water repellency with no post-treatment required.
- Reduces water penetration via surface and capillary action.
- Decreases water absorption, even in direct contact up to 24 hours.

**Waterproof cement-based building materials for added durability with less maintenance**

## *Dow Corning*<sup>®</sup> SHP 50 Silicone Hydrophobic Powder

Increase water repellency and reduce water penetration and absorption in all types of cement-based construction materials with *Dow Corning*<sup>®</sup> SHP 50 Silicone Hydrophobic Powder. This easily used admixture makes such materials more hydrophobic and resistant to the structural damage or appearance problems caused by excess moisture and sunlight (UV) degradation.

### **Easy to use in a range of applications**

Supplied as free-flowing granules, which are easily mixed dry or readily dispersed in water, *Dow Corning* SHP 50 Silicone Hydrophobic Powder:

- Can be easily blended into material formulations during manufacturing or used as an admixture at the job site.
- Adds hydrophobic properties to both exterior and interior cement-based materials, including concrete, cement, joint fillers, stucco, EIFS, plaster, grout, mortar, and more.
- Delivers longer-term performance than stearate-based powders.
- Provides better dispersion than silicone specialties.

### **Active silicone in a dry delivery system**

Developed to offer the waterproofing performance of liquid silicone in a dry delivery system, *Dow Corning* SHP 50 Silicone Hydrophobic Powder consists of white granules that have three components: a powder carrier, an encapsulant, and a finely dispersed active silicone ingredient. The encapsulant enhances storage stability of the powder and, when water is added, releases the active silicone that makes cement-based construction materials hydrophobic upon curing.

*SHP 50 in granule form can be mixed dry or dispersed in water.*



AV10463

## Versatile and effective at low levels

For formulating specific cement-based materials or for use as an admixture on the job site, *Dow Corning* SHP 50 Silicone Hydrophobic Powder is effective at very low levels. Typically, 0.2 to 1.5 percent by weight of the material mixture is needed, and levels up to 2.5 percent have little impact on compression strength. Testing levels for optimum hydrophobic properties and water levels for application consistency is recommended.

## Learn more

For expert advice on how to use *Dow Corning* SHP 50 Silicone Hydrophobic Powder, contact your *Dow Corning* Technical Representative, or email [technicalinfo@dowcorning.com](mailto:technicalinfo@dowcorning.com).

For information about other construction and building protection materials from *Dow Corning*, visit [www.dowcorning.com/construction](http://www.dowcorning.com/construction).

## How to Contact Us

*Dow Corning* has sales offices and manufacturing sites, as well as science and technology laboratories, around the globe. Telephone numbers of locations near you are available on the world wide web at [www.dowcorning.com/construction](http://www.dowcorning.com/construction), or by calling one of our primary locations:

### Asia

*Dow Corning* China  
+86 21 6288 2626

*Dow Corning* Asia Ltd. – Japan  
+81 3 3287 1141

*Dow Corning* Asia – Singapore  
+65 6253 6611

### Australia and New Zealand

*Dow Corning* Australia Pty. Ltd.  
+61 1300 360 732

### Europe

*Dow Corning* Europe S.A.  
+32 64 88 80 00


### North America

*Dow Corning* Corporation World Headquarters  
+1 989 496 6000

### South America

*Dow Corning* do Brasil  
+55 19 3887 9797

## Water Uptake Over Time<sup>1</sup>

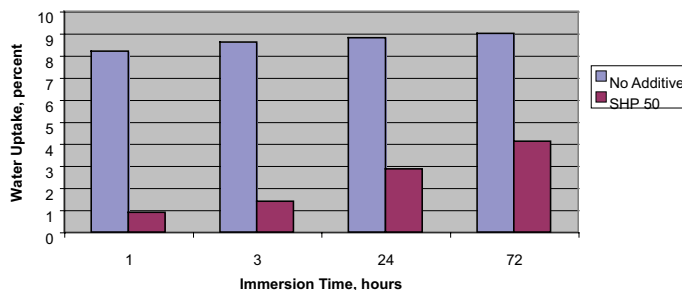

<sup>1</sup>Formulation containing 2.21% *Dow Corning* SHP 50 Silicone Hydrophobic Powder added to 73.34% sand and 24.45% cement versus a control mixture without the additive.

## Typical Properties

Specification Writers: Please contact your local *Dow Corning* Sales Application Engineer or *Dow Corning* Customer Service before writing specifications on this product.

Property	Unit	Value
Appearance		White granules
Particle size distribution, <500 micron	%	100
Mean particle size	µm	300
Bulk density	g/L	600

### LIMITED WARRANTY INFORMATION – PLEASE READ CAREFULLY

The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that *Dow Corning's* products are safe, effective, and fully satisfactory for the intended end use. Suggestions of use shall not be taken as inducements to infringe any patent.

*Dow Corning's* sole warranty is that the product will meet the *Dow Corning* sales specifications in effect at the time of shipment.

Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted.

**DOW CORNING SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY.**

**DOW CORNING DISCLAIMS LIABILITY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES.**

*Dow Corning* is a registered trademark of *Dow Corning* Corporation.

*We help you invent the future.*™ is a trademark of *Dow Corning* Corporation.

©2007 *Dow Corning* Corporation. All rights reserved.

Printed in USA

AGP8888

Form No. 63-1059B-01



*We help you  
invent the future.*™

[www.dowcorning.com](http://www.dowcorning.com)